
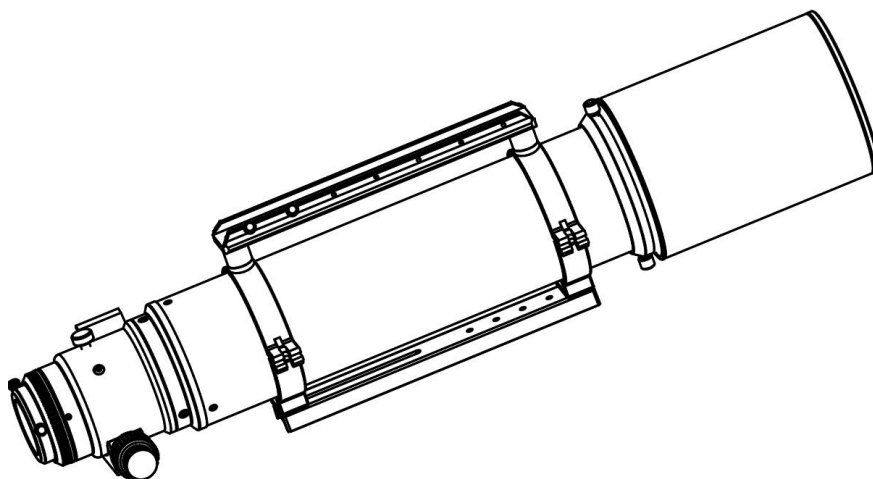


INSTRUCTION MANUAL

EVOSTAR 80/100/120/150 EDX

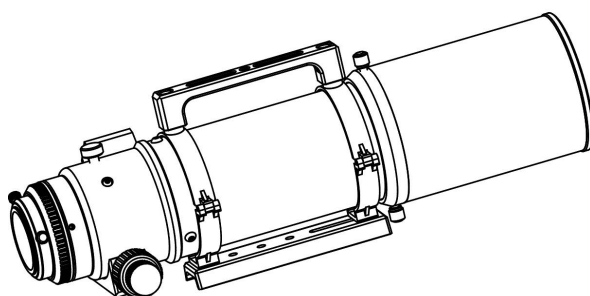


Sky-Watcher®
Be amazed.

202505V1

Table of contents

Introduction.....	2
Specifications.....	3
Thread size of the objective lens cell.....	3
Names and instructions of spare parts	4
Part name.....	4
Retractable dew shield.....	5
Tube ring installation.....	6
Handle.....	6
Focusing assembly.....	7
Rotatable visual back.....	7
Use of the adapter.....	8

Introduction

The “ED” refers to the 2-element fully multi-coated extra-low dispersion lens made of high quality optical glass. It results in highly colour corrected and high contrast images while still offering outstanding value for money.

KEY FEATURES

User level: intermediate & advanced users
Highly recommended for astrophotography
Two element ED refractor
High transmission coatings
Fully baffled and blackened
Quality optical glass
Dual speed focuser.




- THE SUN. PERMANENT EYE DAMAGE WILL RESULT.
- NEVER USE AN EYEPiece-TYPE SOLAR FILTER.
- NEVER USE YOUR TELESCOPE TO PROJECT SUNLIGHT ONTO ANOTHER SURFACE; THE INTERNAL HEAT BUILD-UP WILL DAMAGE THE TELESCOPE OPTICAL ELEMENTS.
- USE A PROPER SOLAR FILTER FIRMLY MOUNTED ON THE FRONT OF THE TELESCOPE FOR VIEWING THE SUN.
- WHEN OBSERVING THE SUN, PLACE A DUST CAP OVER YOUR FINDERSCOPE OR REMOVE IT TO PROTECT YOU FROM ACCIDENTAL EXPOSURE.
- NEVER LET A TELESCOPE POINTING THE SUN UNATTENDED.

Specifications

	<i>EVOSTAR 80EDX</i>	<i>EVOSTAR 100EDX</i>	<i>EVOSTAR 120EDX</i>	<i>EVOSTAR 150EDX</i>
Optical system	Two-elements, one is ED glass	Two-elements, one is ED glass	Two-elements, one is ED glass	Two-elements, one is ED glass
Clear aperture	<i>80mm</i>	<i>100mm</i>	<i>120mm</i>	<i>150mm</i>
Focal Length	<i>600mm</i>	<i>700mm</i>	<i>900mm</i>	<i>1200mm</i>
Focal ratio	<i>F/7.5</i>	<i>F / 7</i>	<i>F/7.5</i>	<i>F / 8</i>
Length (with dew shield retracted)	<i>475mm</i>	<i>570mm</i>	<i>774mm</i>	<i>1067mm</i>
Length (with dew shield extended)	<i>557mm</i>	<i>675mm</i>	<i>848mm</i>	<i>1250mm</i>
Focusing mechanism (dual-speed)	<i>1: 10</i>	<i>1: 10</i>	<i>1: 10</i>	<i>1: 10</i>
Focusing travel	<i>67mm</i>	<i>67mm</i>	<i>67mm</i>	<i>90mm</i>
Aperture of the focusing tube	<i>2.6"</i>	<i>2.6"</i>	<i>2.6"</i>	<i>3"</i>

Thread size of the objective lens cell

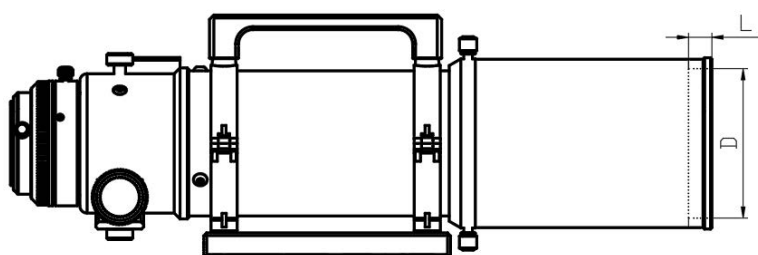

When the dew shield is fully retracted, you can see the thread at the front of the objective lens cell, which is used to connect the front filter and other accessories.

EVOSTAR 80EDX D= M92X1.5 L=13mm


EVOSTAR 100EDX D=M108X1 L=14mm

EVOSTAR 120EDX D=M130X1 L=17mm


EVOSTAR 150EDX D=158X1.5 L=23mm

Names and instructions of spare parts


Part name

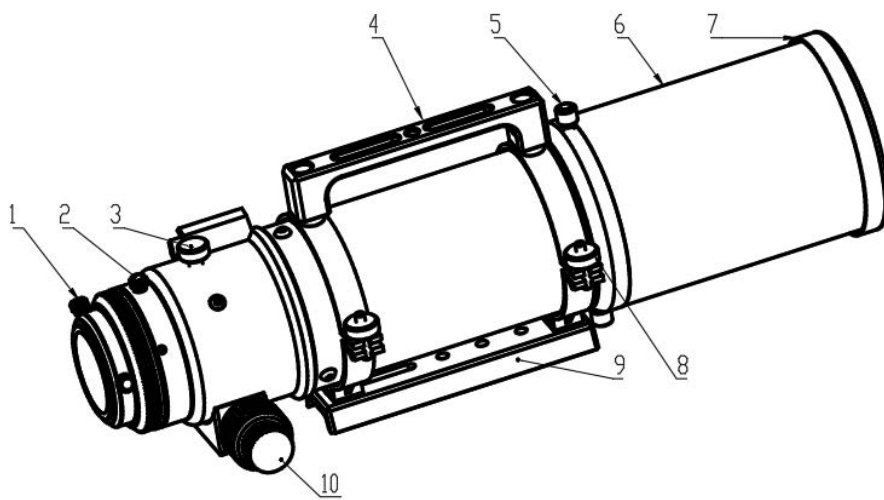

- 1、 2" eyepiece set screw
- 2、 Eyepiece rotation set screw
- 3、 Focusing tube fixed screw 1
- 4、 Handle
- 5、 Dew shield locking screw
- 6、 Dew shield
- 7、 OTA cap
- 8、 Tube ring locking screw
- 9、 Dovetail
- 10、 1:10 dual-speed focusing knob

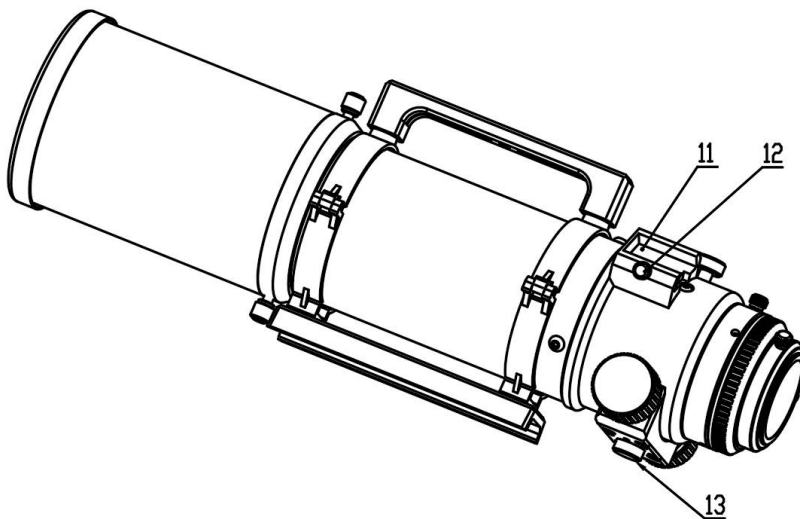

Retractable dew shield

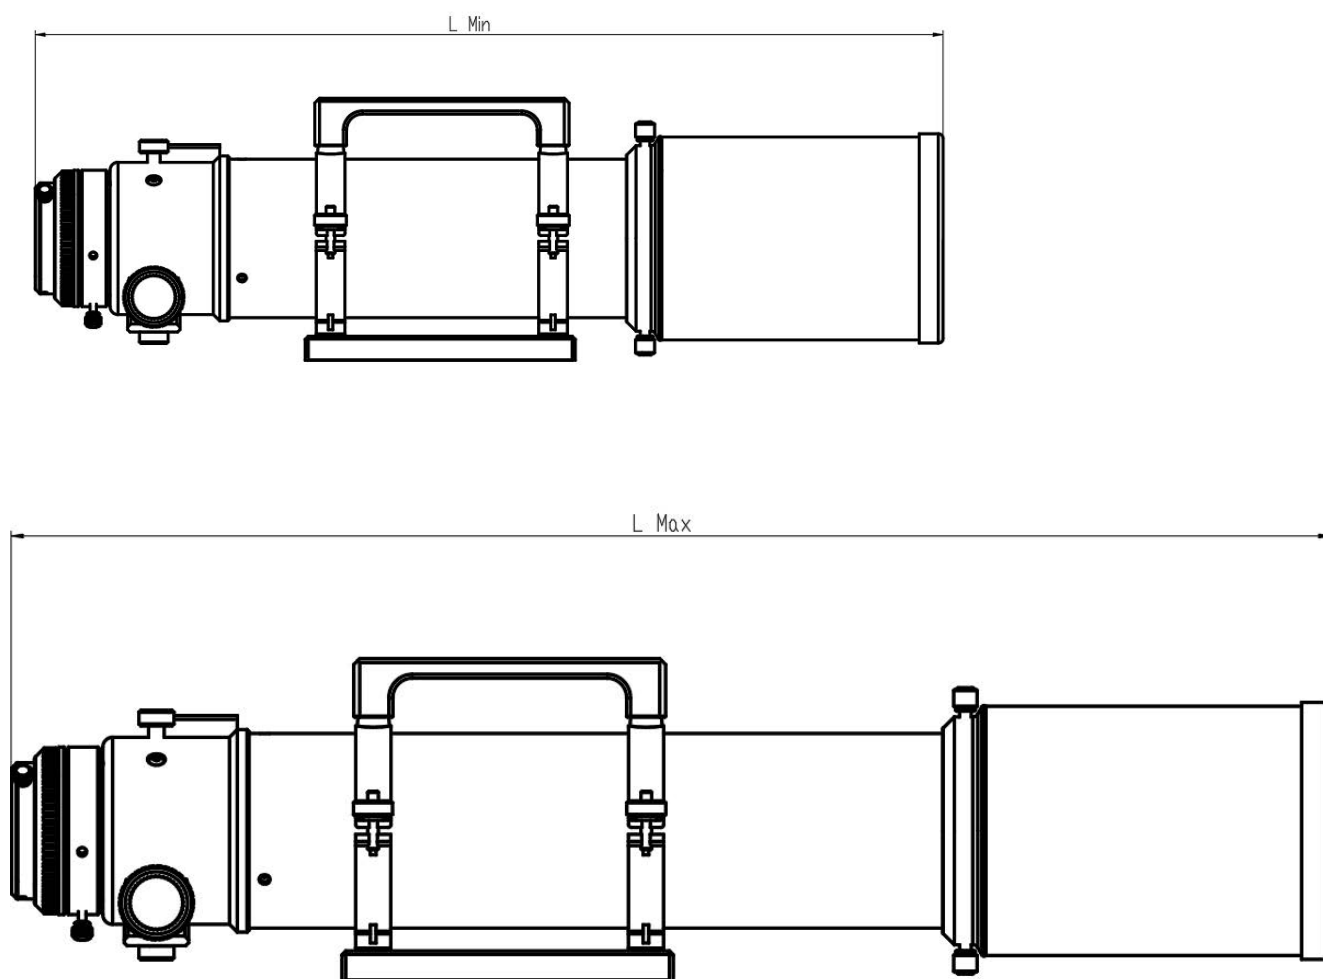


EVOSTAR 80EDX	L Min=475	L Max=557
EVOSTAR 100EDX	L Min=570	L Max=675
EVOSTAR 120EDX	L Min=774	L Max=848
EVOSTAR 150EDX	L Min=1067	L Max=1250

When using the dew shield, extend it to the length as needed and then tighten the dew shield locking screw.


Tube ring installation

Loosen the tube ring locking screws, you can take off the OTA and move it. Tighten the tube ring screws, you can fix the OTA.

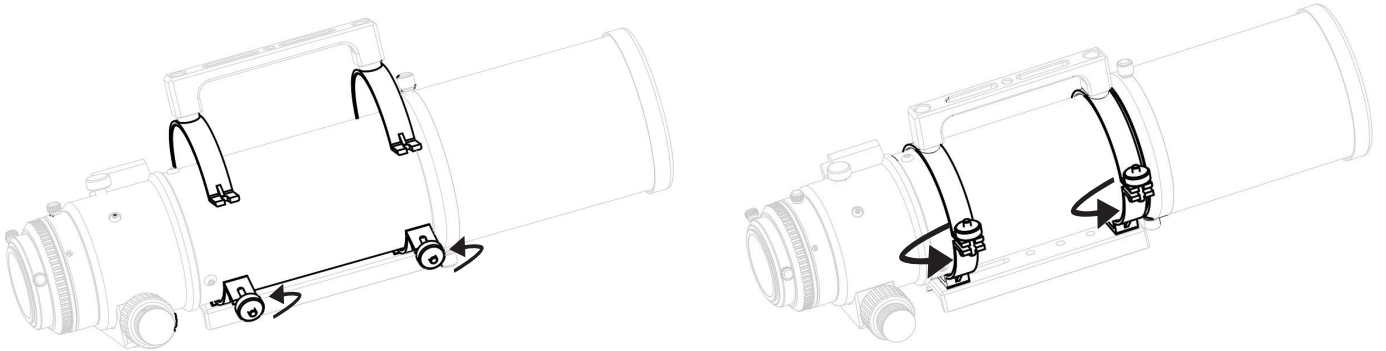


Handle

The handle on the tube ring assembly, in addition to the function of hand grip, the upper slot and the middle 1/4-20 teeth can be used to install other equipments. The specific size is shown in the figure as below.

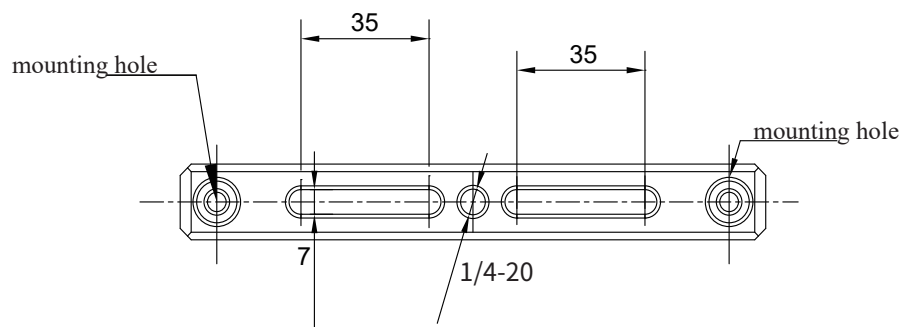


Focusing assembly

It is a 1:10 dual-speed focusing mechanism, which can finish the coarse tuning with bigger size knob and finish the fine tuning with the smaller knob

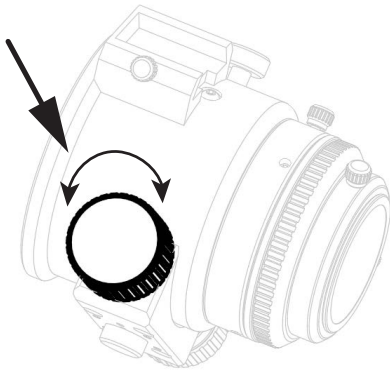


Rotatable visual back


Loosen the 2" eyepiece set screw, the visual back can be rotated, and rotate it as needed, then tighten the screw.

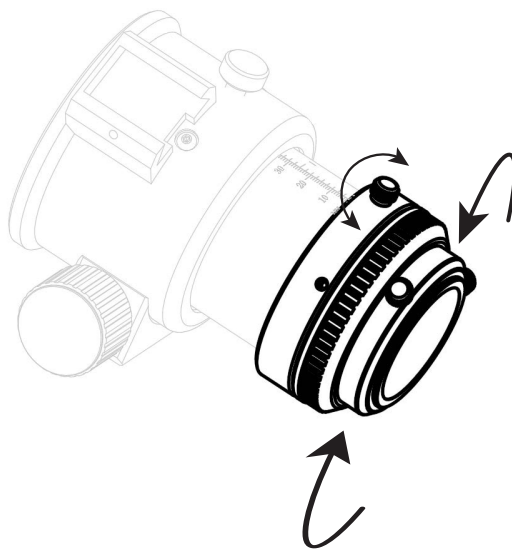

Use of the adapter

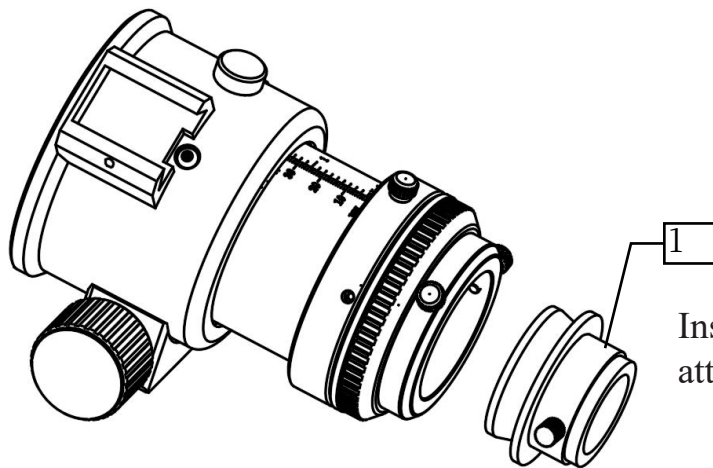

Install the adapter 1, you can attach a 1.25" diagonal

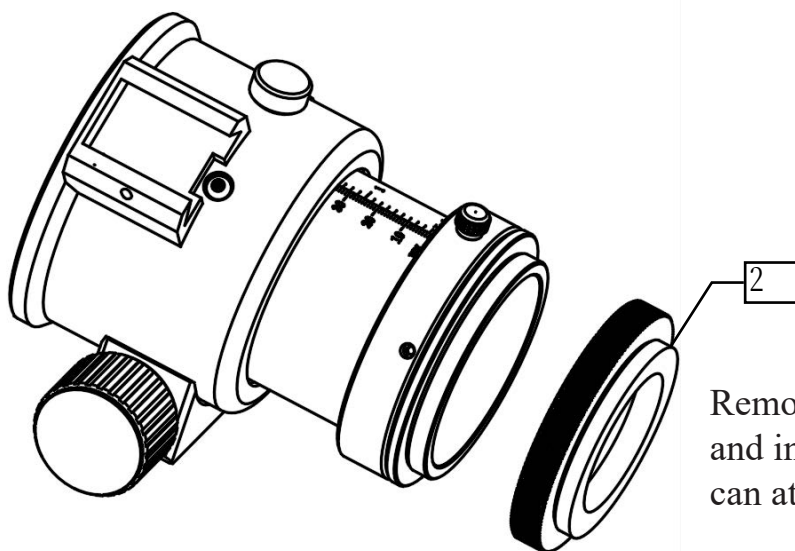

Remove the 2" eyepiece adapter and install the adapter 2, you can attach the flattener.

Note: The flattener needs to be purchased separately.



We want to ensure that your experience with a Sky-Watcher product is the best it can be. To make that happen we have a comprehensive technical and customer support available, alongside with the list of distributors and dealers worldwide, on our worldwide internet site:

<http://www.skywatcher.com>

Sky-Watcher offers this product with the best available quality in accordance with the legislation of the local market, and reserves the right to modify or discontinue, without prior notice to you, any model or style telescope.